

PML AS69RC Transmission Pan, Part Number 11142, on 2014 Ram 3500HD Megacab 6.7 Cummins Diesel 4x4 Dually

February 4, 2016

To Whom it may Concern,

Great product. Took lots of pictures of the install. Factory pan bolts 10mm. Factory drain plug 19mm. To get the rear pan bolts I removed 3 transmission mount nuts from in the rear trans cross member 15mm, jacked up transfer case as high as it would go, about an inch or so. Had plenty of room to get old pan off with 10mm 1/4 inch drive short socket and universal joint and new pan on with Ball Allen 5mm T-handle (see picture). I see no clearance issues at all. I raised the truck up in the rear about 6 inches with front on Rhino ramps, made it easier to get under there. Used original gasket with some High Tack gasket adhesive. My truck only has 13k miles on her. Had a new gasket on hand just in case. Took 11.5 quarts to fill to mid hot level reading after drive to lunch. From what I have read 7.5 quarts is what it takes for drain and fill stock pan. 4ish quarts extra.

Jeff




















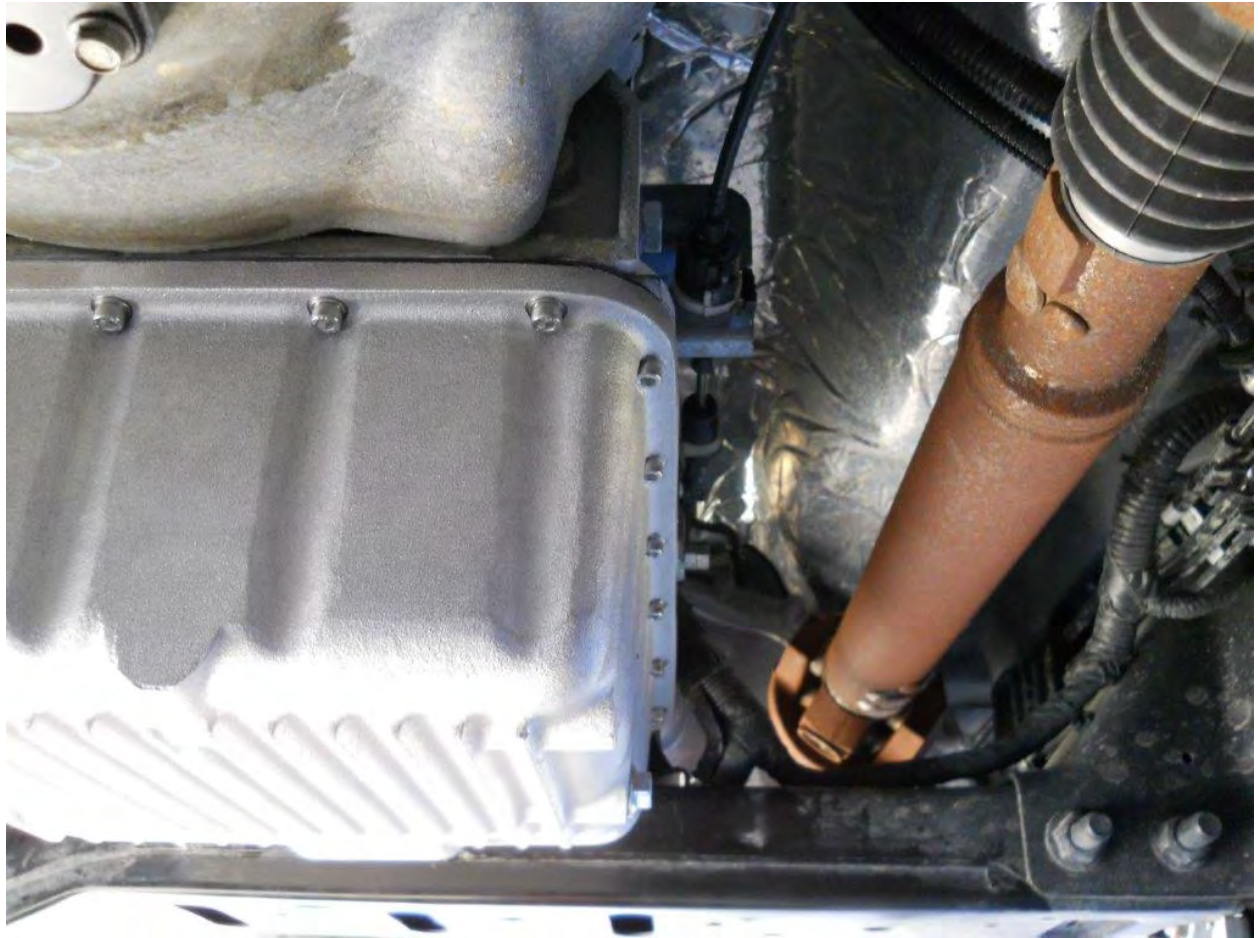



















WARNING
USE ONLY MOPAR
ASRC ATF
(ExxonMobil 3309 ATF)

